

# P2060A-3D

## 3D 5-axis

Experience the unlimited possibilities of laser tube cutting




## Technical Parameters

Diameter: round  $\phi 20\text{mm} - \phi 220\text{mm}$ ;  
 square  $20\text{mm} * 20\text{mm} - 140\text{mm} * 140\text{mm}$   
 Weight for single tube: max 225kg ( $\phi 200\text{mm} * 8\text{mm} * 6000\text{mm}$ )  
 Laser power: 1500W/2000W/3000W/4000W/6000W  
 Bevel angle: max  $\pm 45^\circ$   
 Laser head: Germany LT ULTRA  
 Max rotate speed: max 130r/min  
 Positioning speed: 100m/min  
 Acceleration: 1g



## Machine Details

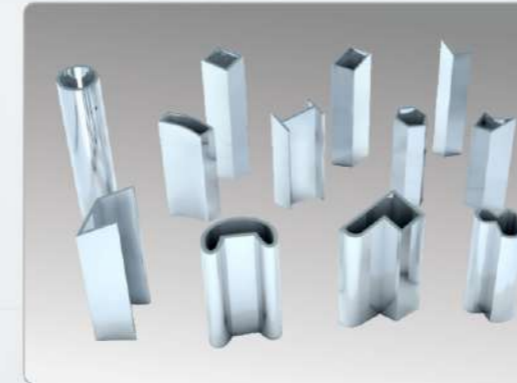

### Comprehensive

A wider range of tube types can be processed, including various special-shaped tubes



### Rapid cut

High-speed cutting is possible for small contours, especially thin-walled pipes, which greatly improves processing efficiency



### Bevel cutting

Can process up to  $\pm 45^\circ$  bevel cutting

## Reduce product costs with the advantages of laser processing

The laser's high-precision and high-speed cutting, combined with the oblique cutting of the swing head, provides unlimited possibilities for product processing. The processing accuracy is extremely high, no subsequent processing is required, and the efficiency and quality are greatly improved

## Samples

